


RAPID

CleverWall

LED Video Wall Solutions

Take your images and videos to the next level, with stunning picture quality showing every detail. With dynamic colour, enhance your content for the complete immersive experience.

CleverWall is suited to many settings. With pixel pitches and sizes to suit your environment. Easy to install, modular in construction, with a cabinet of less than 5kgs. Get the truest blacks and the whitest whites with CleverWall's high resolution technology.

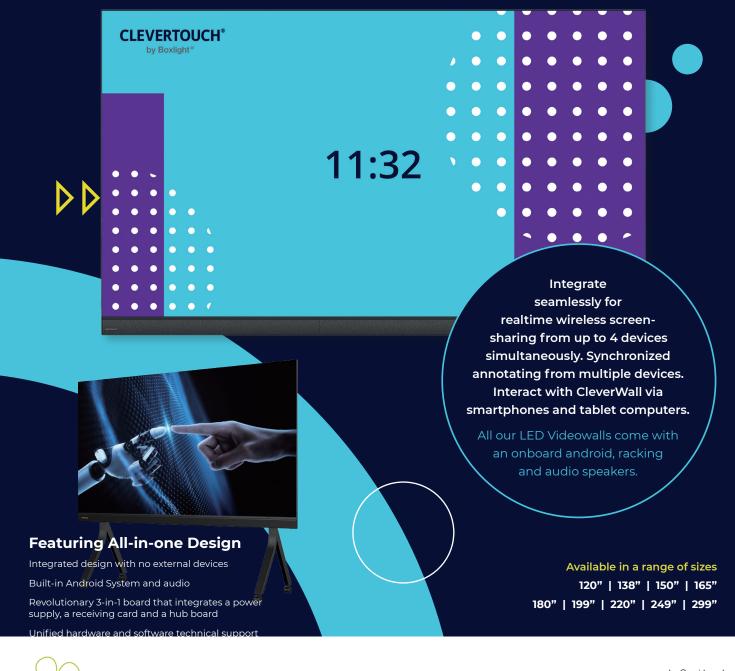

sales@rapid.co.uk 0151 282 1800 www.rapid.co.uk

Key Features







Delivery Simplicity and Efficiency

Ease of use of the monitor functions with the remote control

Plug and play system, one button to turn on/off Smart remote control to access settings



Add a Pico player or CleverHub for a fully functioning, feature rich digital signage and to connect to CleverLive.

CleverWall Specifications

| <table-container>Pied Pich form1.51.51.21.31.7.32.08Form1.301.00</table-container> | Display Diagonal (inches) | 138" | 165" | 220" | 220" | 120" | 150" | 180" | |
|--|---|---|---|----------------|----------------|----------------|----------------|----------------|--|
| <table-container>Name Resolution13519033090135190Resolution1920/16801920/16801920/16801920/16801920/16801920/1680Brightney ResolutionUUSiteSi</table-container> | Pixel Pitch | 1.5 | 1.9 | 2.54 | 1.2 | 1.38 | 1.73 | 2.08 | |
| Resolution1920-10801920-10801920-10801920-10801920-10801920-1080Brightang (iff) | Format | | | | | | | | |
| method is in the second of t | Weight (kg) | 135 | 190 | 330 | 330 | 90 | 135 | 190 | |
| Area for a serie of the seri | Resolution | 1920x1080 | 1920×1080 | 1920×1080 | 3840x2160 | 1920x1080 | 1920x1080 | 1920x1080 | |
| Nervars Rain | Brightness (nits) | | | | ≥550 | | 1 | | |
| <table-container>New and set of the set of</table-container> | Refresh Rate (Hz) | | 3840 | | | | | | |
| Nail and size33001710360020594480275C0.02692414993330173739962248Total Physical Size367327188230.04884228"503.04884228"503.026782118323.0334422004028.54010237928.5Pitter in pictureSSS26782118323.048140237503.026782118323.0334422004028.54010237928.5Picture in pictureSSSSS34422004028.54010237928.5Multer FragencySS <th>Contrast Ratio</th> <th colspan="7">≥3000:1</th> | Contrast Ratio | ≥3000:1 | | | | | | | |
| Ted Physical Seq395/3188/300395/3183/300395/3183/300395/3103/300401/02/32/300401/02/ | Viewing Angle (H/V) | | 160° / 140° | | | | | | |
| Audio frequencySubmit in 2x 30W audio system, 2.0 channel, full frequency raugeInstallation ModeUUSB InterfaceUUSB InterfaceSubmit in 2x 30W audio system, 2.0 channel, full frequency raugeIDMI InterfaceUCabined ArangemetSu56x68x88x84x45x56x6Cabined ArangemetSu56x68x88x84x45x56x6Cabined ArangemetSu56x68x88x84x45x56x6Cabined ArangemetSu56x68x88x84x45x56x6Cabined ArangemetSu55x56x68x88x88x84x45x56x6Cabined ArangemetSu5Su5Su5Su5Su5Su5Su5Su5Power (nosumption (inckes)2.190,742.891,13Su52.9972.9972.997Su5Su5Su5Pikely Consumption (inckes)19.9°2.49°2.9972.9972.997Su5 | Visual Led Size (mm) | 3050x1716 | 3660x2059 | 4880x2745 | 4880x2745 | 2664x1499 | 3330x1873 | 3996x2248 | |
| Alido FrequencyBuil- 2- Status - Stat | Total Physical Size | 3063X1846X30.5 | 3673X2188X30.5 | 4884X2875X30.5 | 4884X2875X30.5 | 2678X1630X28.5 | 3344X2004X28.5 | 4010X2379X28.5 | |
| Mail ModelUSB InterfaceUSUSUS USE USE USE USE USE USE USE USE U | Picture in picture | | Yes - Support HDMI 2.0 PIP | | | | | | |
| YesYesYesYesYesYesS55S57S57S55S57 <th colspan<="" th=""><th>Audio Frequency</th><th colspan="7">Built-in 2x 30W audio system, 2.0 channel, full frequency range</th></th> | <th>Audio Frequency</th> <th colspan="7">Built-in 2x 30W audio system, 2.0 channel, full frequency range</th> | Audio Frequency | Built-in 2x 30W audio system, 2.0 channel, full frequency range | | | | | | |
| HMI InterfaceSx56x68x84x45x56x6Cabiet ArrangementSx56x68x88x84x45x56x6Cabiet MaterialSx5Sx5Sx5Sx5Sx5Maintenance2x19/07.402x89/1.31Sx5Sx5Sx5Sx5Sx5Sx5Power Consumption Onfices2x19/07.402x89/1.31Sx5 <th>Installation Mode</th> <th colspan="7">Wall Mounting / Mobile Stand - Suitable for trolleys up to 165"</th> | Installation Mode | Wall Mounting / Mobile Stand - Suitable for trolleys up to 165" | | | | | | | |
| Cabinet Arrangement Gabinet Material5x56x68x88x84x45x56x6Gabinet MaterialManualSysMagnalSysMagnalSysMagnalSysMagnalSysMagnalSysMagnal <td< th=""><th>USB Interface</th><th colspan="7">Yes</th></td<> | USB Interface | Yes | | | | | | | |
| Cabinet MarcianCabinet AddressionAugualiumMaintenance2.19/0.742.83/1.13 $5 U \cdot T$ $6.202.48$ $1.85/0.4$ $2.42/0.82$ $3.38/1.35$ Power Consumption (Max,/Ave.) (KW) $2.19/0.74$ $2.83/1.13$ $5 U \cdot T$ $6.202.48$ $1.85/0.4$ $2.42/0.82$ $3.38/1.35$ Pise Pitch $2.19/0.74$ $2.83/1.13$ $5 U \cdot T$ $6.202.48$ $1.85/0.4$ $2.42/0.82$ $3.38/1.35$ Pise Pitch 1.97° $6.202.48$ $1.85/0.4$ $2.42/0.82$ $3.38/1.35$ Pise Pitch 1.97° $6.202.48$ $1.85/0.4$ $2.42/0.82$ $3.38/1.35$ Pise Pitch 1.97° $6.202.48$ 9.69° 9.9° Pise Pitch 1.27 $5.202.48$ 9.9° 9.9° Pise Pitch $1.272.48$ $9.822.48$ $9.822.48$ $9.822.48$ Resolution $1.272.482.4893.58$ $9.622.482.4892.58$ $9.622.482.4892.582.482.4892.582.582.582.582.582.582.582.582.582.58$ | HDMI Interface | | | | Yes | | | | |
| Maintenance Ford Resource commption (Max,Ave, (KW)) 2.190.74 2.83/1.13 5∠/r 6.202.48 1.850.74 2.42/0.82 3.38/1.35 Pixel Pixel, (KW) 2.190.74 2.83/1.13 5∠/r 6.202.48 1.850.74 2.42/0.82 3.38/1.35 Display Consumption (Inches) 199° 2 749° 2.42/0.82 3.38/1.35 Pixel Pixch 99° 2 749° 2.42/0.82 3.38/1.35 Pixel Pixch 727 3.38/1.35 3.38/1.35 3.38/1.35 Pixel Pixch Pixel Pixch 727 728/1.52 3.38/1.35 3.38/1.35 <th>Cabinet Arrangement</th> <th>5x5</th> <th>6x6</th> <th>8x8</th> <th>8x8</th> <th>4x4</th> <th>5x5</th> <th>6x6</th> | Cabinet Arrangement | 5x5 | 6x6 | 8x8 | 8x8 | 4x4 | 5x5 | 6x6 | |
| Power Consumption (Max,/Ave.) (KW)2.89/.035.21/.135.21/.241.850.441.850.442.42/0.823.38/.13Display Consumption (Inches)99°249°242/023.38/.13Pikel Pitch99°249°249°29°Pikel Pitch1.275.913.87/.35Pikel Pitch1.275.923.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.92°3.87/.35Pikel Pitch1.272.653.87/.35Pikel Pitch1.272.653.87/.35Pikel Pitch1.275.011.27Pikel Pitch1.271.021.02Pikel Pitch1.271.021.02Pikel Pitch1.271.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021.02Pikel Pitch1.021.021. | Cabinet Material | | | | Magnalium | | | | |
| (My)Image: Market in the second s | Maintenance | | | | Front | | | | |
| (index)(median control of the second of the sec | | 2.19/0.74 | 2.83/1.13 | 5.2/1.77 | 6.20/2.48 | 1.85/0.74 | 2.42/0.82 | 3.38/1.35 | |
| (indes)(median definition of the second | | | | | | | | | |
| FormatAle of the second se | | | 199" | | 249" | | 299" | | |
| Weight (kg)175265375Resolution | Pixel Pitch | | 1.27 | | 1.59 | | 1.91 | | |
| ResolutionImage: Contract of the second of the | Format | | | | 32.9 | | | | |
| Arightness (nits)Herish Rate (Hz)S550Refresh Rate (Hz)G3840Contrast RatioG550:1Yiewing Angle (H/V)GG7320x2058Yisual Led Size (mm)A880x1372GMad20x305Total Physical Size (mm)A894x1489x30.5G7334x2175x30.5Istalation ModeG | Weight (kg) | | 175 | | 265 | | 375 | | |
| Refresh Rate (Hz)SakuRefresh Rate (Hz)SakuContrast RatioSakuViewing Angle (H/V)Gotton:Visual Led Size (man)A & & & & & & & & & & & & & & & & & & & | Resolution | | 3840×1080 | | | | | | |
| Contrast Ratio6500:1Contrast Ratio6500:1Viewing Angle (H/V)6500:1Visual Led Size (mm)4880x13726100x17157320x2058Total Physical Size (mm)6100x17157320x2058Instalation ModeCWII MountingUSB InterfaceYesChinet Arrangement884100x101512x6Cabinet Quantity3250MittenanceFront | Brightness (nits) | | ≥550 | | | | | | |
| Viewing Angle (H/V)Gene Colspan="2">Gene Colspan="2" | Refresh Rate (Hz) | | 3840 | | | | | | |
| Visual Led Size (mm)4880x13726100x17157320x2058Total Physical Size (mm)4894x1489x30.56114x1832x30.57334x2175x30.5Instalation Mode | Contrast Ratio | | 6500:1 | | | | | | |
| Total Physical Size (mm)4894x1489x30.56114x1832x30.57334x2175x30.5Instalation Mode | Viewing Angle (H/V) | | 160°/140° | | | | | | |
| Instalation ModeWall MountingUSB InterfaceYesHDMI InterfaceYesCabinet Arrangement8x410x512x6Gabinet Quantity325072MaintenanceFrontColspan="2">Colspan="2"Colspan="2">Colspan="2">Colspan="2"Colspan="2"Colspan="2">Colspan="2"Colspan="2"Colspan="2">Colspan="2"Colspan="2"Colspan="2">Colspan="2"Colspan="2"Colspan="2">Colspan="2"Colspan="2">Colspan="2"Colspan="2">Colspan="2"Colspan="2">Colspan="2"Colspan="2">Colspan="2"Colspan="2">Colspan="2"Colspan="2"Colspan="2"Colspan="2"Colspan="2"Colspan="2"Colspan="2" | Visual Led Size (mm) | | 4880x1372 | | 6100x1715 | | 7320x2058 | | |
| USB Interface Yes HDMI Interface Yes Cabinet Arrangement 8x4 10x5 Gabinet Quantity 32 50 72 Maintenance Front | Total Physical Size (mm) | | 4894x1489x30.5 | | 6114x1832x30.5 | | 7334x2175x30.5 | | |
| HDMI Interface Yes Cabinet Arrangement 8x4 10x5 Gabinet Quantity 32 50 72 Maintenance Front Contenant of the second of | Instalation Mode | | Wall Mounting | | | | | | |
| Cabinet Arrangement8x410x512x6Cabinet Quantity325072MaintenanceFront | USB Interface | | | | Yes | | | | |
| Cabinet Quantity 32 50 72 Maintenance Front Front | HDMI Interface | | | | Yes | | | | |
| Maintenance Front | Cabinet Arrangement | | 8x4 | | 10x5 | | 12x6 | | |
| | Cabinet Quantity | | 32 | | 50 | | 72 | | |
| Power Consumption (KW) 3.10 4.38 5.66 | Maintenance | | | | Front | | | | |
| | Power Consumption (KW | 0 | 3.10 | | 4.38 | | 5.66 | | |

1. The installation mode with mobile stand only available for 120", 138", 150", 165".

2. "31mm" from overall dimension refers to thickness of screen.

Note: Specifications are for reference only and are subject to change without notice.

© 2021 Clevertouch. All rights reserved. Sahara Presentations Systems PLC. is part of the Boxlight group of companies, and the owner of trademarks in several global jurisdictions including but not limited to Clevertouch, the Clevertouch logo, UX Pro, IMPACT[™], IM